

# PLCC2 SMD Top View Package LED SMTL2-AC, AMBER

**BIVAR**

## SMTL2-AC


- ♦ Industry Standard PLCC2 Footprint
- ♦ Low Profile Package
- ♦ High Luminous Intensity
- ♦ Wide Viewing Angle
- ♦ High Power Efficiency



Bivar SMTL2 LED is offered in an industry standard PLCC2 package with high luminous intensity and wide viewing angles. The miniature package is ideal for small scale applications such as illumination, general indication, and backlighting. Low power consumption and excellent long life reliability are suitable for battery powered equipment. The robust package is ideal for harsh working environments and can be used in clusters for high luminous applications. Wide variety of color and intensity combinations are available to meet any illumination needs. Bivar SMTL2 LED is packaged in standard tape and reels for pick and place assemblies.

Part Number	Material	Emitted Color	Intensity Typ. mcd	Lens Color	Viewing Angle
SMTL2-AC	GaAsP	Amber	22.5	Water Clear	120°

## Outline Dimensions

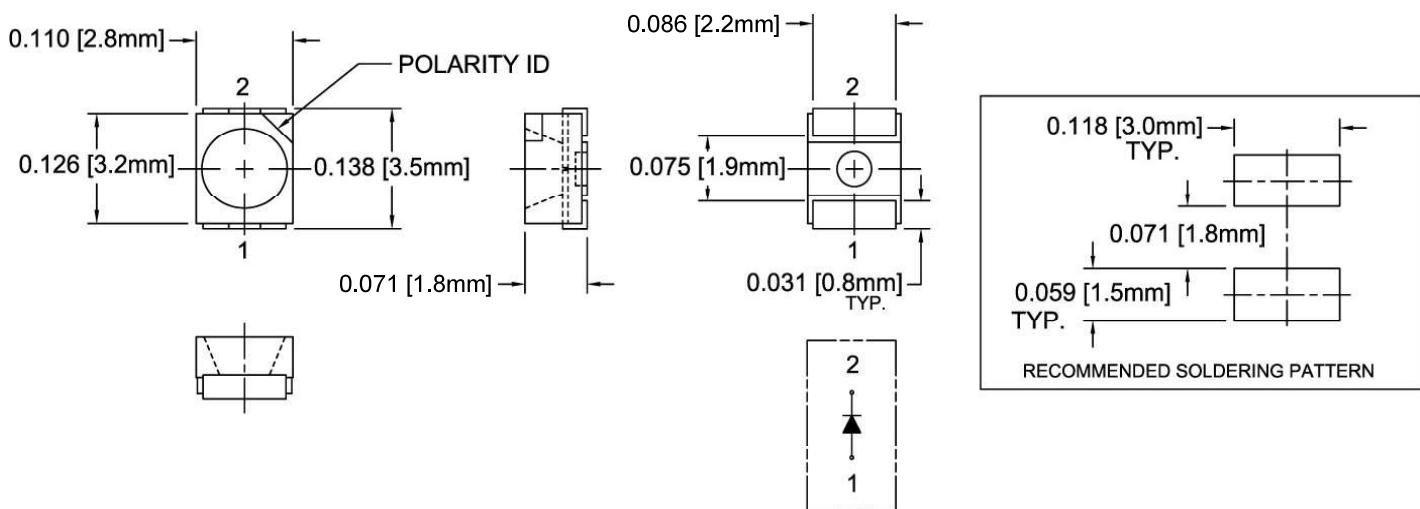

**Outline Drawings Notes:**  
1. All dimensions are in inches [millimeters].  
2. Standard tolerance:  $\pm 0.010"$  unless otherwise noted.



Bivar reserves the right to make changes at any time without notice.

# PLCC2 SMD Top View Package LED SMTL2-AC, AMBER

**BIVAR**

## Absolute Maximum Ratings

T<sub>A</sub> = 25°C unless otherwise noted

Power Dissipation	78 mW
Forward Current (DC)	30 mA
Peak Forward Current <sup>1</sup>	100 mA
Reverse Voltage	5 V
Derating Linear From 25°C	0.4 mA/°C
Operating Temperature Range	-40 - +85°C
Storage Temperature Range	-40 - +85°C
Lead Soldering Temperature ( 3 mm from the base of the epoxy bulb ) <sup>2</sup>	260°C
Electrostatic Discharge (HBM)	2000 V

Notes: 1. 10% Duty Cycle, Pulse Width ≤ 0.1 msec. 2. Solder time less than 5 seconds at temperature extreme.

## Electrical / Optical Characteristics


T<sub>A</sub> = 25°C & I<sub>F</sub> = 20 mA unless otherwise noted

Emitting Color	Forward Voltage (V) <sup>1</sup>			Recommend Forward Current (mA)			Reverse Current (μA)	Dominant Wavelength (nm) <sup>2</sup>			Luminous Intensity I <sub>V</sub> (mcd) <sup>3</sup>			Viewing Angle 2 Θ ½ (deg)
	MIN	TYP	MAX	MIN	TYP	MAX		MIN	TYP	MAX	MIN	TYP	MAX	
Amber	1.8	2.0	2.3	/	20	/	10	/	602	/	14.5	22.5	36	120

Notes: 1. Tolerance of forward voltage : ±0.1V. 2. Tolerance of dominant wavelength : ±1.0nm. 3. Tolerance of luminous intensity : ±10%

## Directivity Radiation

T<sub>A</sub> = 25°C unless otherwise noted

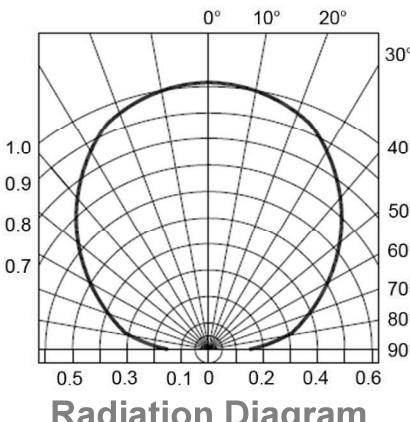

Bivar reserves the right to make changes at any time without notice.

# PLCC2 SMD Top View Package LED SMTL2-AC, AMBER

**BIVAR**

## Typical Electrical / Optical Characteristics

T<sub>A</sub> = 25°C unless otherwise noted

Relative Spectrum Emission I<sub>rel</sub> = f (I), T<sub>A</sub> = 25°C , I<sub>F</sub> = 20 mA  
V(I) = Standard eye response curve

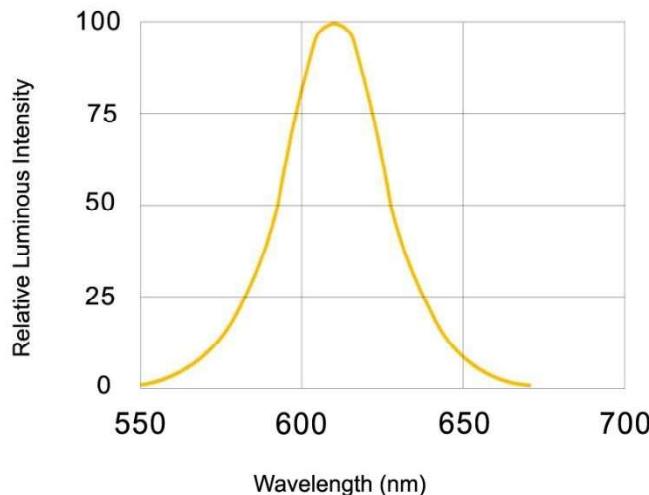


Fig.1 Relative Luminous Intensity vs. Wavelength

Forward Current I<sub>F</sub> = f ( V<sub>F</sub> )  
T<sub>A</sub> = 25°C


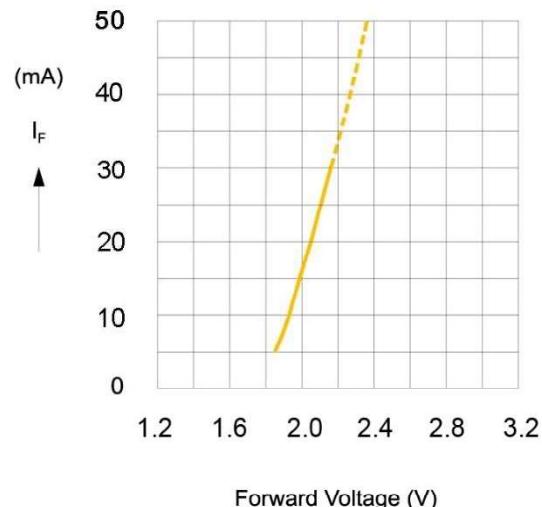


Fig.2 Forward Current vs. Forward Voltage


Relative Luminous Intensity I<sub>V</sub>/I<sub>V</sub> (20 mA) = f (I<sub>F</sub>)  
T<sub>A</sub> = 25°C

Ambient Temperature vs. Allowable Forward Current

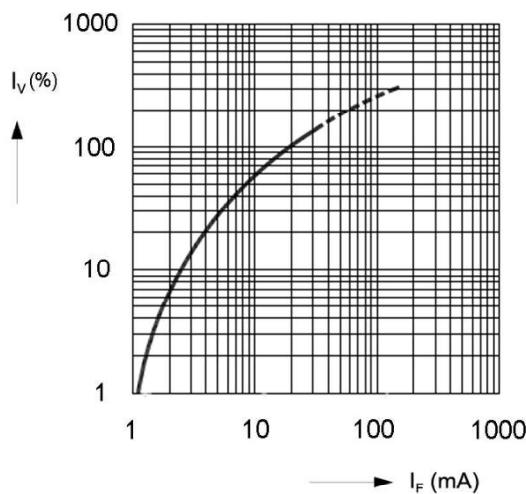

Forward Current I<sub>F</sub> (mA)

Fig.3 Relative Luminous Intensity vs. Forward Current

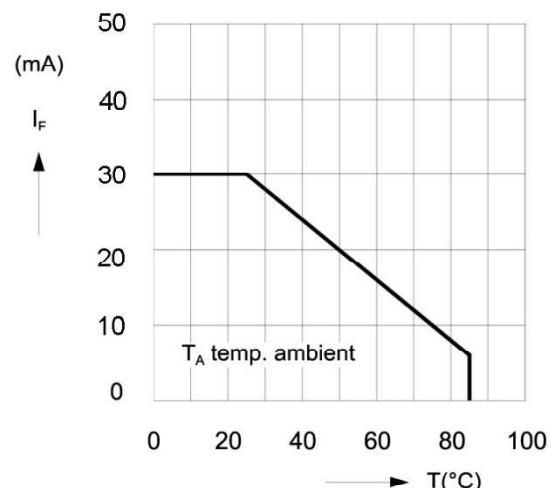

Ambient Temperature T<sub>A</sub> (°C)

Fig.4 Forward Current vs. Ambient Temperature


Bivar reserves the right to make changes at any time without notice.

# PLCC2 SMD Top View Package LED SMTL2-AC, AMBER

**BIVAR**

## Recommended Soldering Conditions

Temp. (°C)	Time (Sec)	
a 25	T0~T1	Max. 3°C/sec
b 150	T1~T2	90~130 sec
c 200	T2~T4	Max. 3°C/sec
d 220	T3~T6	Max. 50sec
e 245		
f Max. 260		Max. 10sec
	T5~T7	Max. -3°C/sec
Belt Speed	70~90 cm/min	

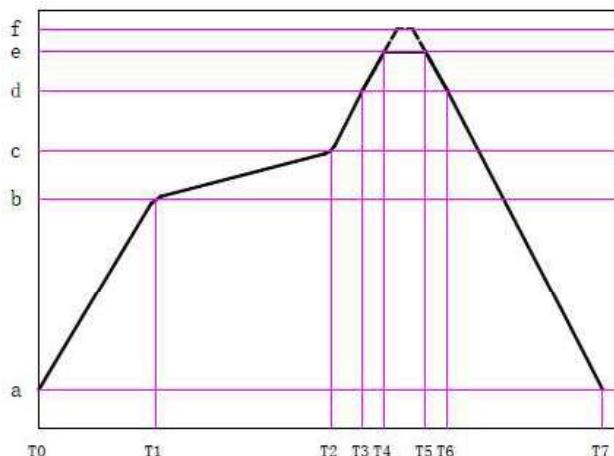


## Soldering Iron

1. Temperature at tip of iron: 300°C Max. (25W Max.)
2. Soldering time: 5 ± 1sec.

## Tape and Reel Dimensions

Note: 2000 pcs/Reel

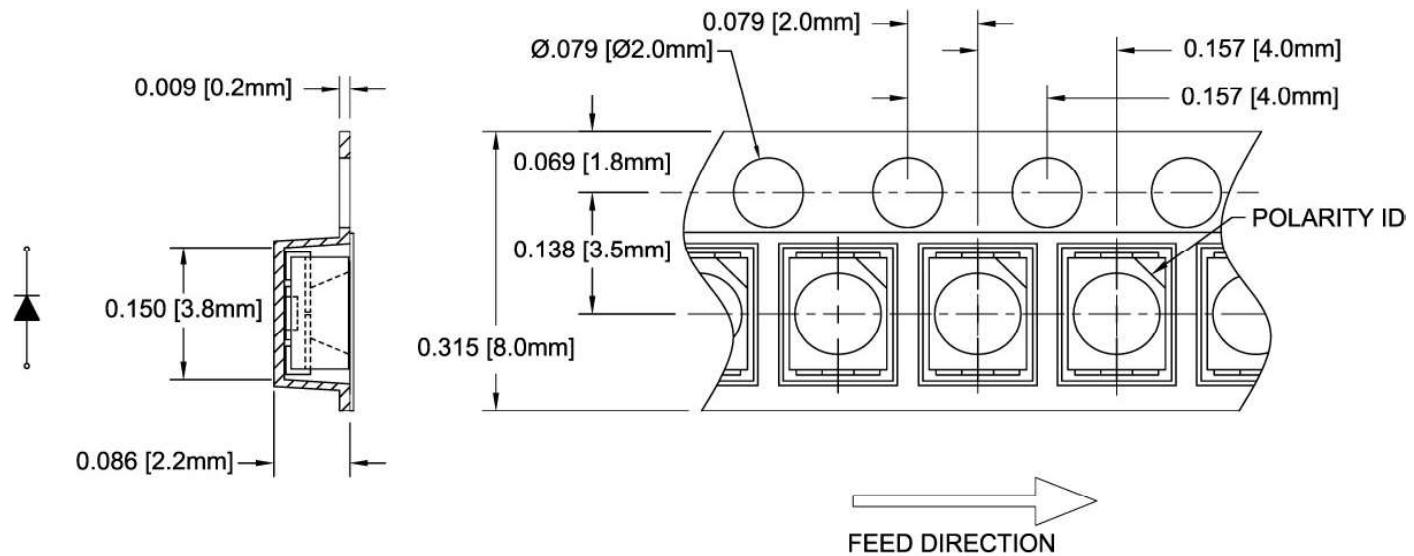


### Outline Drawings Notes:

1. All dimensions are in inches [millimeters].
2. Standard tolerance: ±0.010" unless otherwise noted.

Bivar reserves the right to make changes at any time without notice.

# PLCC2 SMD Top View Package LED SMTL2-AC, AMBER

**BIVAR**

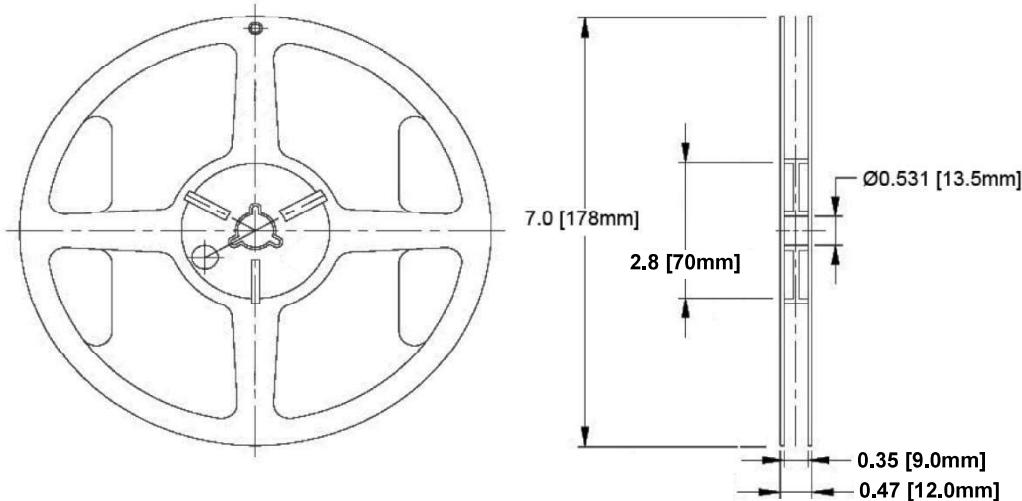


#### Outline Drawings Notes:

1. All dimensions are in inches [millimeters].
2. Standard tolerance unless otherwise noted:  $X.XXX \pm 0.010"$   
 $X.X \pm 0.1"$

## Packaging and Labeling Plan

Note: 1 Reel / Bag

Sealed ESD and Moisture Barrier Bag

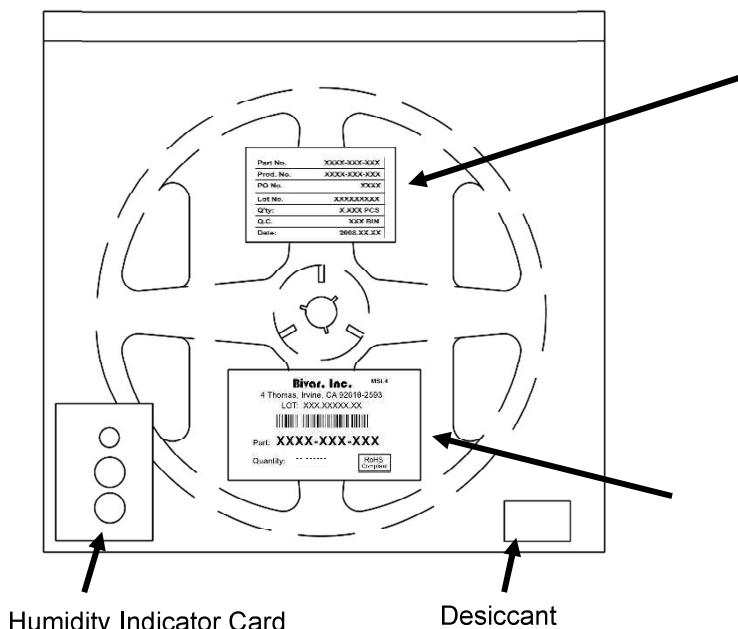

Part No.	XXXX-XXX-XXX
Prod. No.	XXXX-XXX-XXX
PO No.	XXXX
Lot No.	XXXXXXXXXX
Q'ty:	X.XXX PCS
Q.C.	XXX BIN
Date:	2008.XX.XX

Internal Quality Control Label



Bivar Standard Packaging Label

Bivar reserves the right to make changes at any time without notice.