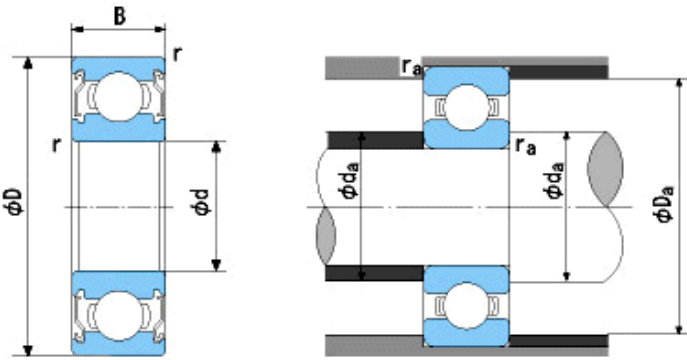


[TopPage](#)>>[Search Result](#)>>6207ZZE

Deep-groove Ball Bearings

Bearing No. : **NACHI 6207ZZE**

Bearing Type Two shields **Clearance** CN(Normal) **Tolerance Class** Normal Class
 (0.006~0.020)

<p>Dimensions</p> <p>d = 35 0 -0.012</p> <p>D = 72 0 -0.013</p> <p>B = 17 0 -0.120</p> <p>r = 1.1~2 (Radial Direction)</p> <p>r = 1.1~3.5 (Axial Direction)</p>		<p>Dimensions</p> <p>da(min) = 42</p> <p>Da(max) = 65</p> <p>ra(max) = 1</p> <p>Mass = 0.288 kg</p>
--	--	---

<p>Basic Dynamic Load Rating Cr : 25,700 N</p> <p>Basic Static Load Rating Cor : 15,300 N</p> <p>Limiting Speed ;</p> <p style="margin-left: 20px;">Grease Lubrication : 9,800 min⁻¹</p> <p style="margin-left: 20px;">Oil Lubrication : - min⁻¹</p>	<table border="0"> <thead> <tr> <th></th> <th>INNER RING</th> <th>OUTER RING</th> </tr> </thead> <tbody> <tr> <td>O.D.Surface Runout with Side :</td> <td></td> <td>-</td> </tr> <tr> <td>Axial Runout with Bore :</td> <td>-</td> <td></td> </tr> <tr> <td>Axial Runout with Raceway :</td> <td>-</td> <td></td> </tr> <tr> <td>Width Variation :</td> <td>0.020</td> <td>0.020</td> </tr> <tr> <td>Radial Runout :</td> <td>0.015</td> <td>0.025</td> </tr> </tbody> </table>		INNER RING	OUTER RING	O.D.Surface Runout with Side :		-	Axial Runout with Bore :	-		Axial Runout with Raceway :	-		Width Variation :	0.020	0.020	Radial Runout :	0.015	0.025
	INNER RING	OUTER RING																	
O.D.Surface Runout with Side :		-																	
Axial Runout with Bore :	-																		
Axial Runout with Raceway :	-																		
Width Variation :	0.020	0.020																	
Radial Runout :	0.015	0.025																	

Back
> Calc
> DXF
Print